


INDUSTRIAL TRACK MOUNT SWITCH SET



4700-A SERIES

- ◆ Reversible Probe Assembly
- ◆ Left or Right Installation
- ◆ Reversible Cable Exit
- ◆ 3 ft. Armored Cable Standard
- ◆ Multi Position Adjustable Magnet Bracket
- ◆ Closed Loop or SPDT
- ◆ Hinge Design for Tighter Clamping to Track
- ◆ Up to 3" Gap
- ◆ Fits Channels from 1.75" up to 4".
- ◆ Self Drilling Screws Included For Easy Installation
- ◆ Contacts are on the Channel and not where they can get damaged on the floor
- ◆ No Special Tools Required for Installation

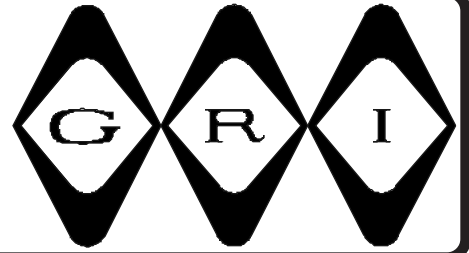

4700-A

DESCRIPTION:

The G.R.I. 4700-A Series Industrial Track Mount Switches are designed to eliminate false alarms from standard floor switches getting damaged by fork lifts and other equipment. The contacts are moved up onto the track and out of the way of equipment.

The 4700-A Series switches are designed to be easy to install and very adjustable. They can attach to a wide range of track sizes and only require tightening one screw to install the contacts. It can be installed on either side of the door and the cable exit can be reversed to simplify installation.

An adjustable magnet bracket extends the reach on particularly difficult installations and self drilling screws shorten installations times. Also with a gap of up to 3 inches, doors that wear and get misaligned are not a problem.

PART NUMBERS:

	Closed Loop	SPDT
Gap Up To 3"	4700-A	4701-A

GEORGE RISK INDUSTRIES, INC.
G.R.I. PLAZA
KIMBALL, NE 69145



MADE IN U.S.A.

TOLL-FREE 1-800-445-5218
TOLL-FREE 1-800-523-1227
(308) 235-4645

FAX (308) 235-3561

E-MAIL: grisales@megavision.com

WEB SITE: www.grisk.com



INDUSTRIAL TRACK MOUNT SWITCH SET






INSTALLATION INSTRUCTIONS:

Select a location on the channel that will be out of the way during normal use of the door. The switch can be located anywhere along the channel. This location should also have a matching location on the door when it is in the closed position that the magnet can be attached to.

If necessary reverse the armored cable by removing the screw opposite the cable and moving the probe to the opposite side of the switch. Then just reinstall the screw.

Assemble the switch by sliding the hinge plate into the slot on switch and inserting the L shaped bracket into the slot on the switch. Then squeeze the switch assembly around the channel making sure the switch locks into a slot on the L shaped bracket. Then just tighten the hex head screw to firmly attach switch to channel.

The magnet is installed by locating a position on the door that will be out of the way as the door is opened and closed. The magnet should be placed vertically and so that it will stay in range of the switch as the door wears or moves around. There are multiple mounting positions on the magnet bracket in order to make finding the mounting position easier.

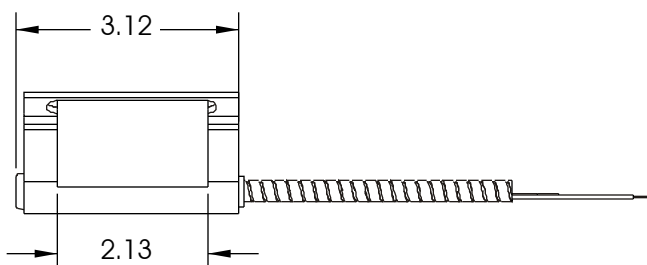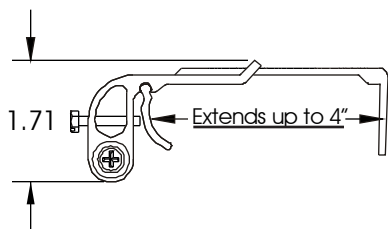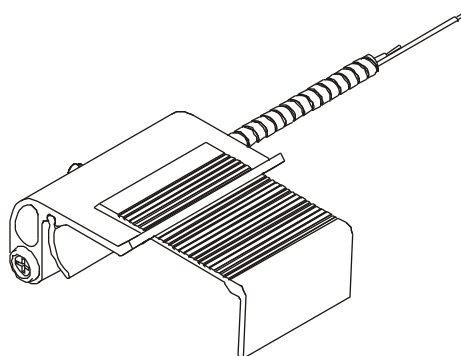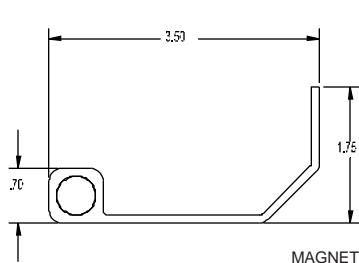

GRI products meet or exceed these minimum general specifications:

PART NUMBER	LOOP TYPE	ELECTRICAL CONFIG.	REED FORM	MAXIMUM INITIAL CONTACT RESISTANCE (Ω)	MAXIMUM CONTACT RATING (W)	MAXIMUM SWITCHING VOLTAGE (VDC/VAC)	MAXIMUM SWITCHING CURRENT (A)
4700-A	CLOSED	N/O	A	0.150	10	160/110	0.400
4701-A	OPEN/CLOSED	SPDT	C	0.140	5	175VDC	0.250

CONTACT YOUR G.R.I. DISTRIBUTOR OR CALL:

GEORGERISK INDUSTRIES, INC.
GRI PLAZA
KIMBALL, NE 69145



MADE IN U.S.A.

TOLL-FREE 1-800-445-5218
TOLL-FREE 1-800-523-1227
(308) 235-4645
FAX (308) 235-3561
E-MAIL: grisales@megavision.com
WEB SITE: www.grisk.com