


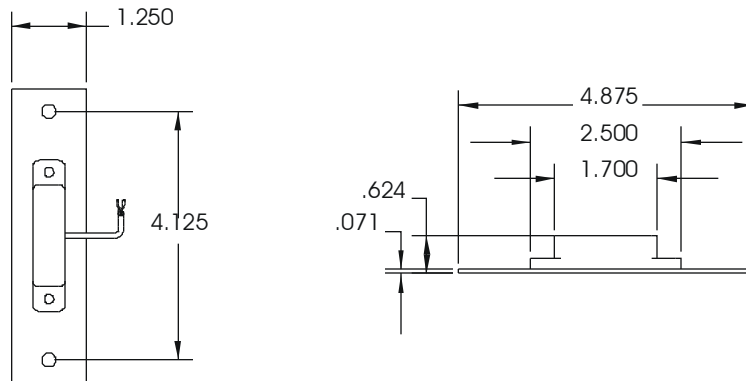
# RECESSED ANSI SWITCH



- ◆ U.L. Listed 
- ◆ Optimum Concealment Application
  - ◆ One Inch Gap On S.P.D.T.
  - ◆ 36" Jacketed Cable Lead, Custom Lengths Available
  - ◆ Easy Install Replaces standard ANSI Stainless Steel Door Plate
- ◆ Covert Installation Enhances Resistance To Tampering Or Compromise



229



**GRI products meet or exceed these minimum general specifications:**

PART NUMBER	LOOP TYPE	ELECTRICAL CONFIG.	REED FORM	MAXIMUM INITIAL CONTACT RESISTANCE (Ω)	MAXIMUM CONTACT RATING (W)	MAXIMUM SWITCHING VOLTAGE (VDC/VAC)	MAXIMUM SWITCHING CURRENT (A)
229	Open/Closed	SPDT	C	.140	5	175 VDC	.250

**WARRANTY:**

Lifetime warranty against workmanship, material and factory defects.

GEORGE RISK INDUSTRIES, INC.  
GR.I. PLAZA  
KIMBALL, NE 69145



MADE IN U.S.A.

TOLL-FREE 1-800-445-5218  
TOLL-FREE 1-800-523-1227  
(308) 235-4645

FAX (308) 235-3561  
E-MAIL: [grisales@megavision.com](mailto:grisales@megavision.com)  
WEB SITE: [www.grisk.com](http://www.grisk.com)